


Technical Data

14 x 130mm 5G Engineered Oak

Board Construction:

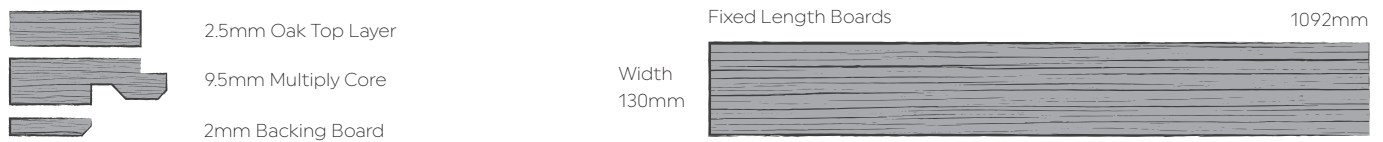

Product Specification & Handling Information:

| | | | |
|---------------|--------|-------------------|----------------------|
| Board Depth: | 14mm | Pack Size: | 0.9937m ² |
| Board Width: | 130mm | Pack Weight: | 8.6kg |
| Board Length: | 1092mm | Packs Per Pallet: | 49 |

Board Detail:

| | | | |
|--|--------------------------|----------------|--------------------|
| Type of Board: | Engineered Wood Flooring | Fix System: | Välinge 5G LOC |
| Finish: | Lacquered Natural Oil | Grade: | Rustic / Character |
| Bevel Detail: | 4V Bevel | Core Material: | Pine |
| Density of Finish: According to EN13489 Testing Brinell (EN1534) | Average Hardness 37 MPa | Janka Reading: | 1360 |

Manufacturer Testing Standard:

| | | | |
|--------------------|---|-----------------------|-----------|
| Standard: | EN14342:2013 - Three-layer Flooring Board | | |
| Reaction to Fire: | Dfl - s1 | Formaldehyde: | E-1 |
| Minimum Density: | 500 kg/m ³ | Thermal Conductivity: | 0.14 W/mK |
| Minimum Thickness: | 14mm | Biological Stability: | NPD |

Misc Items:

| | | | | | |
|-----------------------|---|--|--|--------------------|------------|
| Residential Warranty: | 15 Years | Commercial Warranty: | On Application | | |
| Oak Origin: | Europe | Manufactured In: | Poland | | |
| Installation Type: | <input checked="" type="checkbox"/> Float | <input checked="" type="checkbox"/> Bond | <input checked="" type="checkbox"/> Nail | Underfloor Heating | Suitable * |

* Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



©Copyright 2021

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.